






**IDEAL APPLICATION
COMMERCIAL & RESIDENTIAL**

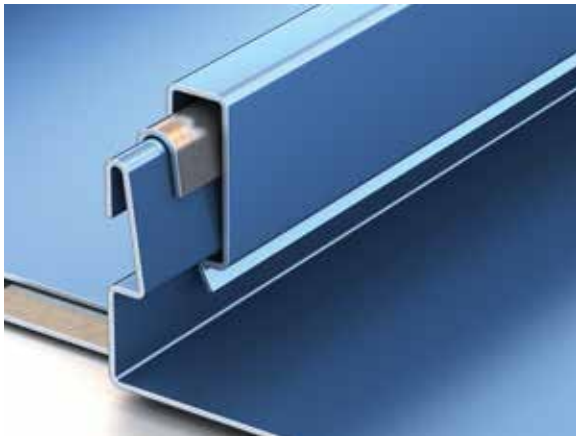

WEATHER TIGHTNESS WARRANTY APPROVED!

A superior integral seam design and quick installation – that’s the hallmark of the DMC 550S panel. This expertly crafted interlocking roof system provides a powerfully protective weathertight seam. The finished results deliver a substantial measure of quality and style that’s certain to stand the test of time.

DMC 550S PROFILE

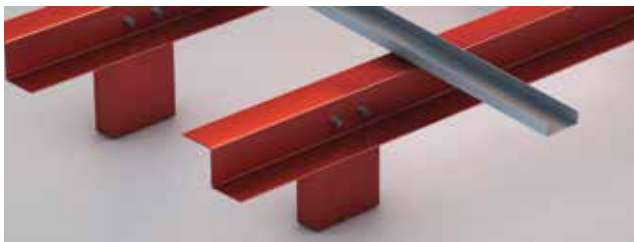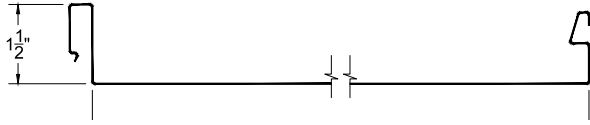

Testing in accordance with



AVAILABLE WIDTHS

12", 14", 16" or 19"

*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

SUBSTRATES AVAILABLE

- Galvalume® - 24ga
- Drexlume® - 24ga

PROFILE OPTIONS

- Single lock panel
- Double lock panel
- Radius panel (single or double lock)



FINISHES AND PRODUCT WARRANTY:

Available in a variety of coatings and colors by Valspar. See the Drexel Metals color card for standard colors and paint specifications.

GALVALUME® SUBSTRATE - 35 YEAR WARRANTY

35 YEAR NON PRO-RATED PVDF PAINT WARRANTY
High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

DREXLUME® SUBSTRATE - 25 YEAR WARRANTY

Mill finished Galvalume® with a two-sided, clear acrylic finish.

PRODUCTION OPTIONS

Factory made or field rolled to exact lengths
Optional: striation, beads, pencil ribs

INSTALLATION

Can be installed over open frame steel purlins, or over plywood decking and Drexel Metals MetShield® underlayment.

SLOPE

Minimum slope 3:12

MINIMUM ROOF PITCH

3:12 - low roof pitch

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third-Party Verified