

Versatile and economical, DMC Corrugated exposed fastener panel can be used for almost any exterior or interior use, including architectural, industrial, commercial, residential, and agricultural wall, roof, liner or soffit.

Panels can be run either horizontally or vertically. Perforations in some substrates are available for acoustical applications.


Features:

- Coverage: 32" or 37-3/8"
- Rib spacing: 2.67"
- Rib height: 7/8"
- Standard anti-siphon groove
- Lengths: Up to 45' standard (Longer lengths available)
- Attachment: Through fastened, exposed fasteners
- Slope requirement: 3:12

Gauges and Coatings:

- Gauges: 22ga, 24ga, 26ga and 29ga
- Coatings: Galvalume, Kynar500, Silicone-modified Polyester, Paint Grip/Bonderized



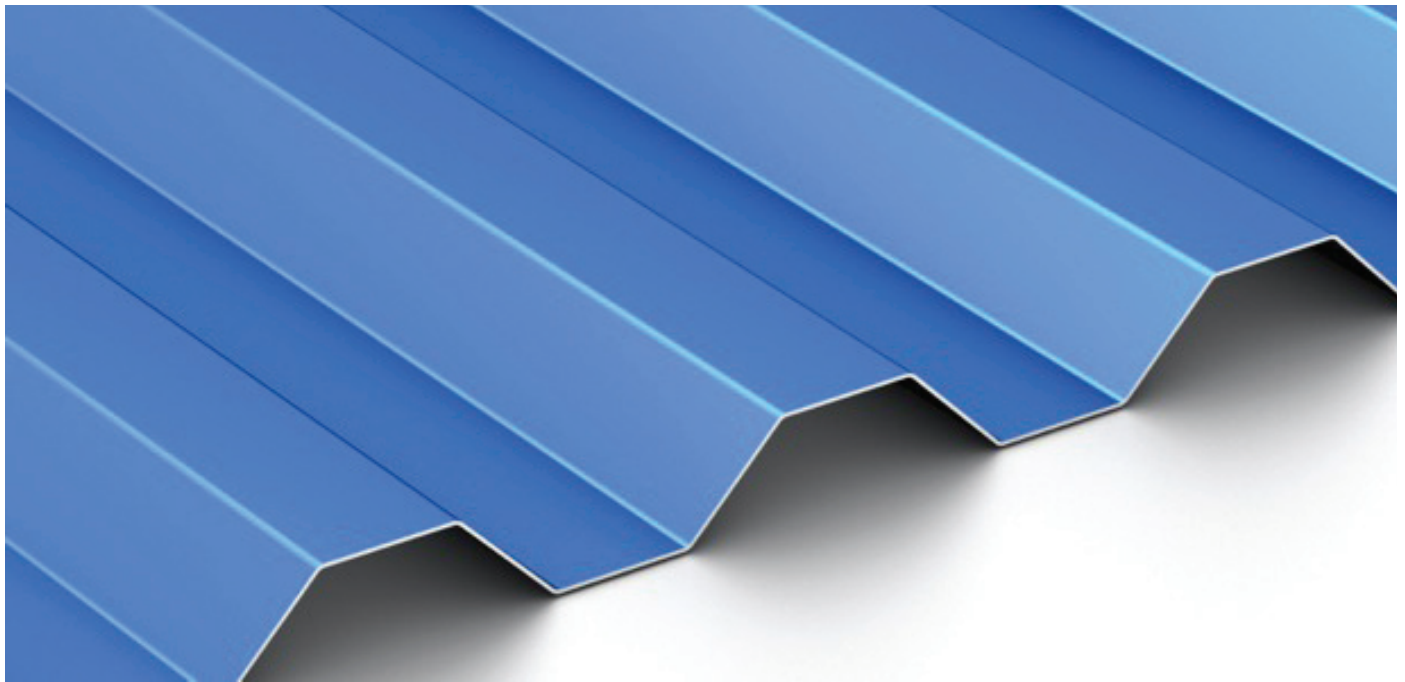

With its classic design, DMC 7.2 panel has a bold look that can be used for almost any exterior or interior use, including architectural, industrial, commercial, residential, and agricultural wall, roof, liner or soffit.

These panels have excellent strength and spanning capability and can be run either horizontally or vertically.

Substrates available:

- Galvalume: 22ga, 24ga and 26ga
- SMP Color Finish: 24ga and 26ga
- Kynar500 Color Finish: 22ga and 24ga

Features:

- Coverage: 32" or 36"
- 1-1/2" rib height at 7.2" on center
- Standard anti-siphon groove
- Lengths: Up to 45'
- Standard trim, flashing, and accessories
- Installed over open framing or solid substrate
- Slope requirement: Minimum 1:12 pitch recommended

Performance / Testing:

- UL 580 Class 90 Wind Uplift
- UL 2218 Class 4 Impact
- UL 790 Class A Fire Rating

