

## DMC 5V PROFILE



### PANEL DETAILS

#### AVAILABLE WIDTHS

20.5", 24"\*

#### OPTIMAL PANEL WIDTHS

20.5", 24"

\*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at [www.drexelmetals.com](http://www.drexelmetals.com)


### SUBSTRATES AVAILABLE

- Painted Galvalume® - 22ga, 24ga, and 26ga
- Drexlume™ - 22ga, 24ga, and 26ga
- Aluminum - .032", .040"

### IDEAL APPLICATION


#### ARCHITECTURAL, COMMERCIAL & RESIDENTIAL

Our DMC 5V profile offers a genuine "Key West" look and is highly valued for its combination of style and functionality. The 24-inch panel span, 3/8-inch rib height, and exposed fastener design all contribute to a sturdy and attractive finish that can withstand severe weather conditions for years to come.

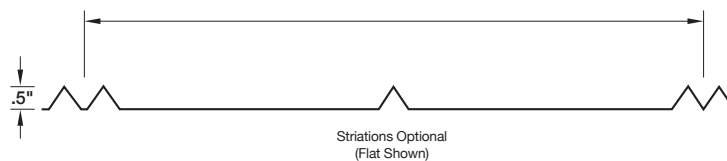


# DMC 5V PROFILE


## PROFILE



## PANEL RIB OPTIONS



Flat Panel



Striations

## PRODUCT INFORMATION

### FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

### PANEL RIB

Factory made or field rolled to exact lengths

- Flat Panel
- Striations

### INSTALLATION

Can be installed over plywood decking ( $\frac{15}{32}$ " Minimum) with approved underlayments. Please see Drexel Metals installation details for complete information.

### SLOPE

Minimum slope 2:12

### TESTING

- TAS 100
- UL 580 Wind Uplift (Class 90)

Testing in accordance with



## WARRANTY

### 35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non Pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

### 25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume with a two-sided, clear acrylic finish.