



PANEL DETAILS

AVAILABLE WIDTHS

13", 17", and 21"

STANDARD PANEL WIDTHS

17"


*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at www.drexelmetals.com

SUBSTRATES AVAILABLE

- Painted Galvalume® - 24ga and 26ga
- Drexlume™ - 24ga and 26ga
- Aluminum - .032"
- Copper - 16 oz and lead-coated copper
- Zinc

**IDEAL APPLICATION
COMMERCIAL & RESIDENTIAL**

Quality materials and more than 100 years of successful design application govern the construction of our DMC 100SS 1" mechanically seamed metal roof system. Ideal for light commercial or residential applications, this smartly detailed profile can be curved for enhanced architectural appeal. Installed as full-length panels with no end laps helps provide the ultimate in all-weather and watertight protection curved installations.

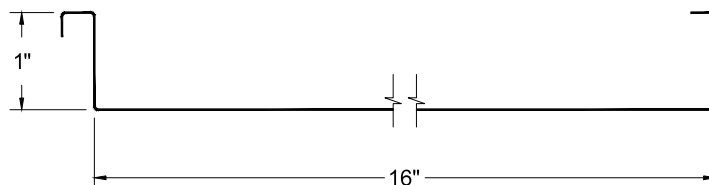

DMC 100SS PROFILE

PROFILE OPTIONS




Single lock panel




Double lock panel


PANEL RIB OPTIONS




Flat Panel




Clip Relief




Striations




Bead




Small V



Large V



Small Pencil



Large Pencil

PRODUCT INFORMATION

PROFILE OPTIONS

- Single lock panel
- Double lock panel
- Radius panel (single or double lock)

FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

PANEL RIB

Factory made or field rolled to exact lengths options

- Flat Panel
- Clip Relief
- Striations
- Bead
- Small and Large V
- Small and Large Pencil

INSTALLATION

Can be installed over plywood decking with approved underlayments. Please see Drexel Metals installation details for complete information.

SLOPE

Minimum slope 2:12

TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third Party Verified
- UL 263 Fire Certification

Testing in accordance with



WARRANTY

35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume with a two-sided, clear acrylic finish.



SHERWIN-WILLIAMS
Coil Coatings

CORPORATE HEADQUARTERS: 1234 GARDINER LANE, LOUISVILLE, KY 40213 | 888-321-9630 TOLL-FREE | 502-690-6174 FAX | DREXELMETALS.COM

©2022 Drexel Metals, Inc. All rights reserved. Galvalume® is a registered trademark of BEIC International, Inc. Sherwin-Williams® Coil Coatings is trademark of The Sherwin-Williams Company. Drexlume™ is a trademark of Drexel Metals, Inc. Colors shown represent the actual color as closely as possible. To ensure exact color for final approval, a metal color chip is available. Warranty statements mentioned are outlines; complete Limited Warranty information is available on request. No other warranty expressed or implied is applicable. Please call or visit drexelmetals.com or residentialmetalroof.com for more details.