



### PANEL DETAILS

#### AVAILABLE WIDTHS

12" - 20"\*

#### OPTIMAL PANEL WIDTHS

12", 16


\*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at [www.drexelmetals.com](http://www.drexelmetals.com)

#### SUBSTRATES AVAILABLE

- Painted Galvalume® - 24ga and 26ga
- Drexlume™ - 24ga
- Aluminum - .032"

### IDEAL APPLICATION RESIDENTIAL

Our DMC 100NS profile offers unlimited design potential with its sleek, crisp appearance and attractive shadow lines. Eliminating the need for metal roof clips, the concealed 1" self-locking Snap Lock system creates a powerfully protective seal. Versatile and refined, this easy-to-install metal roof delivers superior beauty, durability and strength while showcasing architectural details.

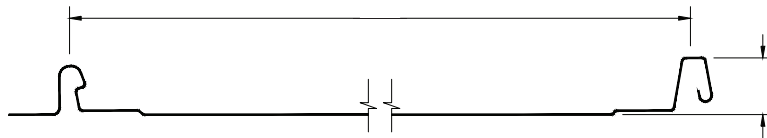


# DMC 100NS PROFILE


## PROFILE




## PANEL RIB OPTIONS




Flat Panel




Clip Relief




Striations




Bead




Small V



Large V



Small Pencil



Large Pencil

## PRODUCT INFORMATION

### FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

### PANEL RIB

Factory made or field rolled to exact lengths options

- Flat Panel
- Clip Relief
- Striations
- Bead
- Small and Large V
- Small and Large Pencil

### INSTALLATION

Can be installed over plywood decking with approved underlayment. Please see Drexel Metals installation details for complete information.

### SLOPE

Minimum slope 3:12

### TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third Party Verified
- Florida Building Code Approved
- TAS 125 Wind Uplift
- TAS 100 Wind Driven Rain
- UL1897 Extended Phase Wind Uplift
- Miami Dade County Approved

Testing in accordance with



## WARRANTY

### 35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

### 25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume with a two-sided, clear acrylic finish.

**SHERWIN-WILLIAMS**  
Coil Coatings