



DMC 175S - PLYWOOD

ZOOMED IN VIEW

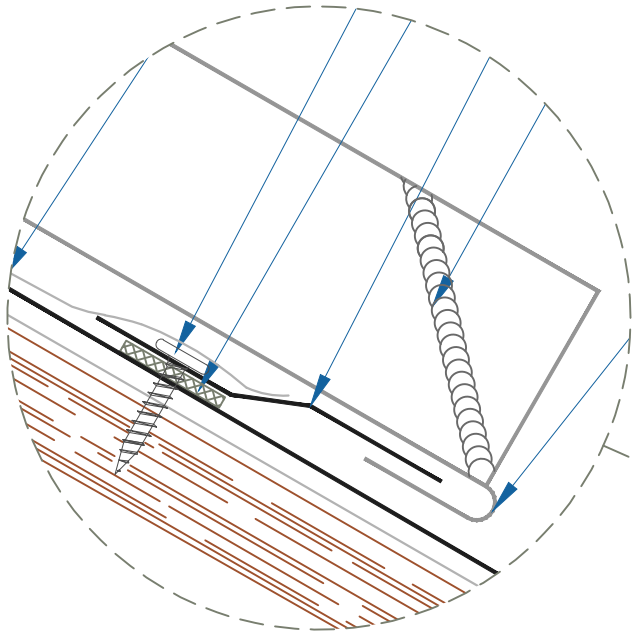

NTS

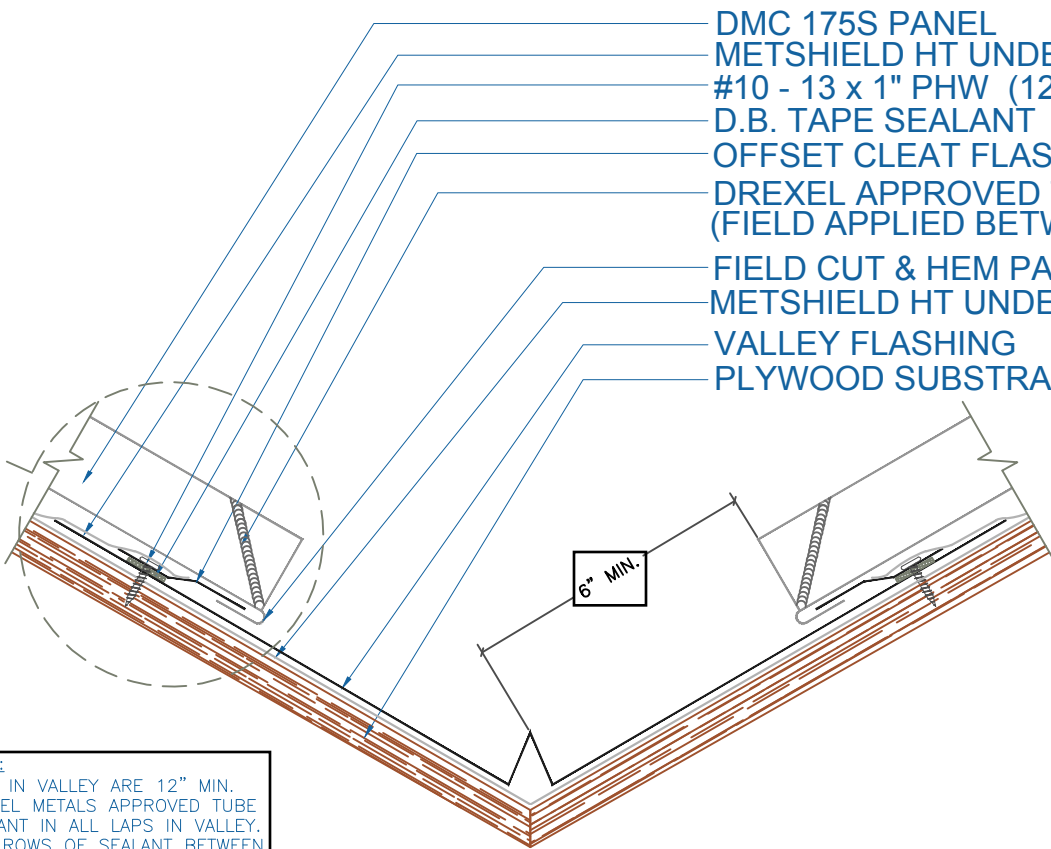

- DMC 175S PANEL
- METSHIELD HT UNDERLAYMENT
- #10 - 13 x 1" PHW (12" o.c.)
- D.B. TAPE SEALANT
- OFFSET CLEAT FLASHING
- DREXEL APPROVED TUBE SEALANT (FIELD APPLIED BETWEEN PANEL RIBS)
- FIELD CUT & HEM PANEL 180°
- METSHIELD HT UNDERLAYMENT
- VALLEY FLASHING
- PLYWOOD SUBSTRATE (1/2" MIN.)

- NOTE:**
1. LAPS IN VALLEY ARE 12" MIN. DREXEL METALS APPROVED TUBE SEALANT IN ALL LAPS IN VALLEY. TWO ROWS OF SEALANT BETWEEN VALLEY LAPS, 4" UP FROM LAP.
 2. LARGE ROOF AREAS MAY REQUIRE A LARGER GAP BETWEEN PANEL AND DIVERTER TO ALLOW FOR STORM WATER RUN OFF.

EFFECTIVE DATE: 8-1-17
 SUBJECT TO CHANGE WITHOUT NOTICE

VALLEY
 SCALE: 3" = 1'-0"