


FACADE BR - Z-GIRT

OUTSIDE CORNER DETAIL

VERTICAL APPLICATION



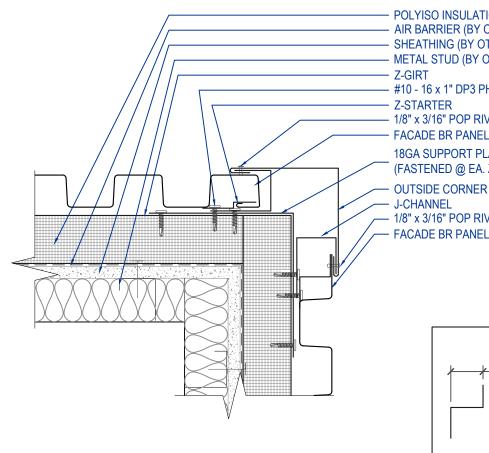

POLYISO INSULATION AIR BARRIER (BY OTHERS) SHEATHING (BY OTHERS)

METAL STUD (BY OTHERS)

#10 - 16 x 1" DP3 PHD (12"o.c.)

1/8" x 3/16" POP RIVET (12" o.c.)

18GA SUPPORT PLATE *

(FASTENED @ EA. Z-GIRT)

OUTSIDE CORNER J-CHANNEL

1/8" x 3/16" POP RIVET (12" o.c.)

- FACADE BR PANEL

THIS DETAIL DRAWING IS APPLICABLE TO ALL FACADE BR SERIES WALL PANEL PROFILES












KEYNOTES:

- TRIM FASTENERS ARE SELF-DRILL PANCAKE HEAD AND MUST BE BE INSTALLED IN A STAGGERED PATTERN
- FASTENERS MUST PENETRATE STEEL SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH

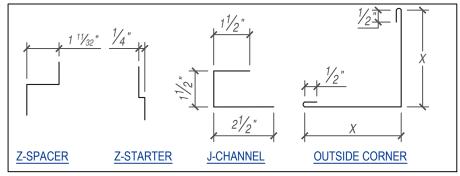

FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY, ACTUAL PROJECT DETAIL MAY VARY

SCALE: 3" = 1'-0" EFFECTIVE DATE: 01-01-2023

SUBJECT TO CHANGE WITHOUT NOTICE

★ NOTE: MAY OMIT SUPPORT PLATE IF ATTACHING FLASHING TO STRUCTURAL MEMBER.