





THIS DETAIL DRAWING IS APPLICABLE TO ALL FACADE HL SERIES WALL PANEL PROFILES



(CONCEALED CLIP OPTION)

KEYNOTES:


- TRIM FASTENERS ARE SELF-DRILL PANCAKE HEAD AND MUST BE BE INSTALLED IN A STAGGERED PATTERN
- FASTENERS MUST PENETRATE STEEL SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH

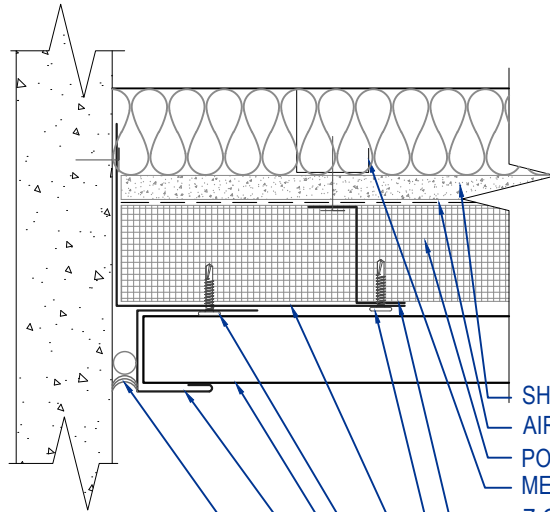


- SHEATHING (BY OTHERS)
- AIR BARRIER (BY OTHERS)
- POLYISO INSULATION
- METAL STUD (BY OTHERS)
- Z-GIRT
- #10 - 16 x 1" DP3 PHD (12"o.c.)
- 18GA SUPPORT PLATE * (FASTENED @ EA. Z-GIRT)
- #10 - 16 x 1" DP3 PHD (12"o.c.)
- FACADE HL PANEL
- J-CHANNEL
- DREXEL APPROVED TUBE SEALANT WITH BACKER ROD

* **NOTE:**
MAY OMIT SUPPORT PLATE IF ATTACHING FLASHING TO STRUCTURAL MEMBER.

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 01-01-2023
SUBJECT TO CHANGE WITHOUT NOTICE

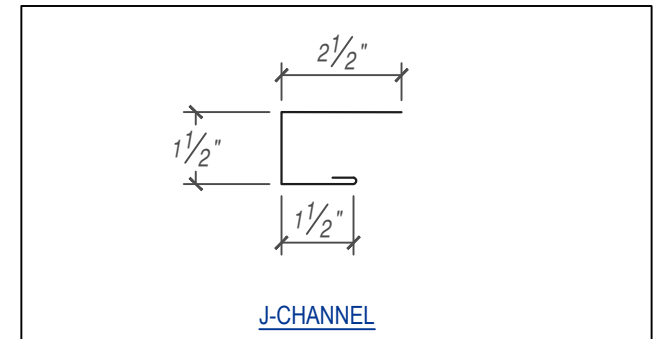

FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY