


FACADE HL - Z-GIRT

OUTSIDE CORNER DETAIL


VERTICAL APPLICATION



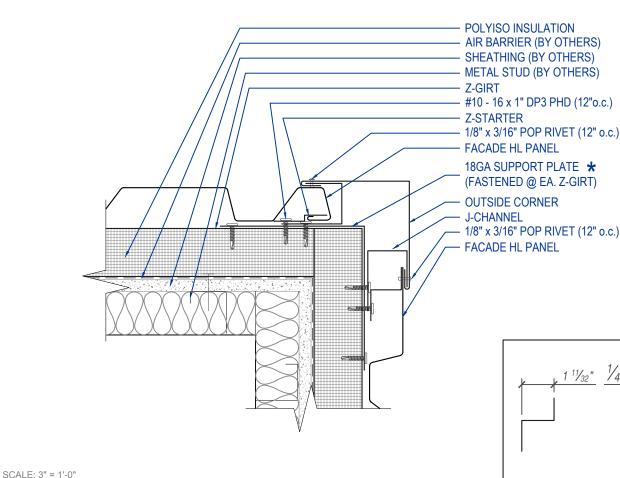


★ NOTE:

THIS DETAIL DRAWING IS APPLICABLE TO ALL FACADE HL SERIES WALL PANEL PROFILES



KEYNOTES:

- TRIM FASTENERS ARE SELF-DRILL PANCAKE HEAD AND MUST BE BE INSTALLED IN A STAGGERED PATTERN
- · FASTENERS MUST PENETRATE STEEL SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH

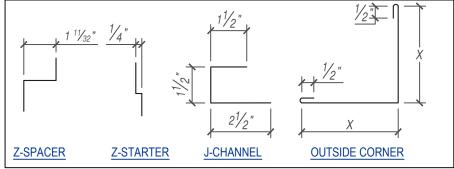

FLASHINGS

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY, ACTUAL PROJECT DETAIL MAY VARY

DREXEL METALS - DREXMET.COM

SUBJECT TO CHANGE WITHOUT NOTICE

EFFECTIVE DATE: 01-01-2023

MAY OMIT SUPPORT PLATE IF ATTACHING

FLASHING TO STRUCTURAL MEMBER.