



FACADE HL - Z-GIRT
SILL DETAIL
VERTICAL APPLICATION

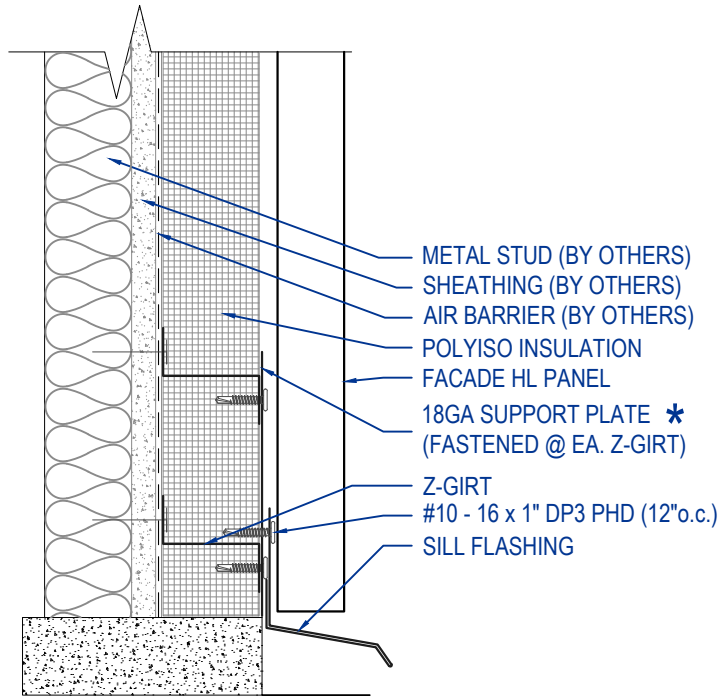

- METAL STUD (BY OTHERS)
- SHEATHING (BY OTHERS)
- AIR BARRIER (BY OTHERS)
- POLYISO INSULATION
- FACADE HL PANEL
- 18GA SUPPORT PLATE *
(FASTENED @ EA. Z-GIRT)
- Z-GIRT
- #10 - 16 x 1" DP3 PHD (12"o.c.)
- SILL FLASHING


*** NOTE:**
MAY OMIT SUPPORT PLATE IF ATTACHING
FLASHING TO STRUCTURAL MEMBER.

SCALE: 3" = 1'-0"




EFFECTIVE DATE: 01-01-2023
SUBJECT TO CHANGE WITHOUT NOTICE

THIS DETAIL DRAWING IS APPLICABLE TO ALL FACADE HL SERIES WALL PANEL PROFILES

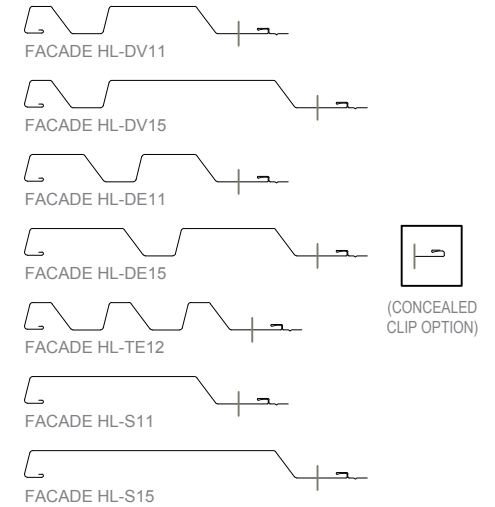

KEYNOTES:

- TRIM FASTENERS ARE SELF-DRILL PANCAKE HEAD AND MUST BE BE INSTALLED IN A STAGGERED PATTERN
- FASTENERS MUST PENETRATE STEEL SUBSTRATE BY 5/8" MINIMUM THREAD LENGTH

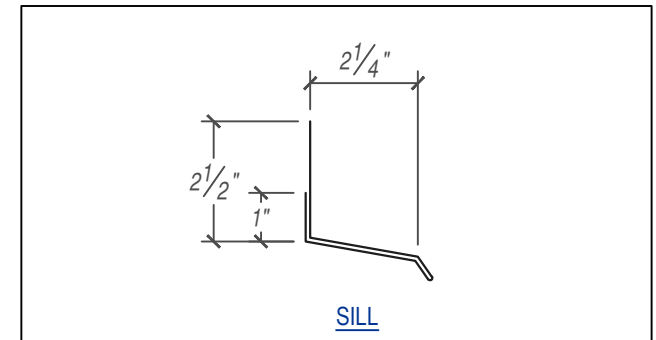

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY