

## DMC 550S PROFILE



### PANEL DETAILS

#### AVAILABLE WIDTHS

12" - 19"\*

#### OPTIMAL PANEL WIDTHS

15", 19"


\*Drexel Metals design pressures, wind uplifts and test reports are for specific deck attachments, material gauges, clip spacing and panel widths. A complete specification and listing is available online at [www.drexelmetals.com](http://www.drexelmetals.com)

#### SUBSTRATES AVAILABLE

- Painted Galvalume® - 22ga, 24ga, and 26ga
- Drexlume™ - 22ga, 24ga, and 26ga
- Aluminum - .032", .040"

### IDEAL APPLICATION COMMERCIAL & RESIDENTIAL

A superior integral seam design and quick installation - that's the hallmark of the DMC 550S panel. This expertly crafted interlocking roof system provides a powerfully protective weathertight seam. The finished results deliver a substantial measure of quality and style that's certain to stand the test of time.

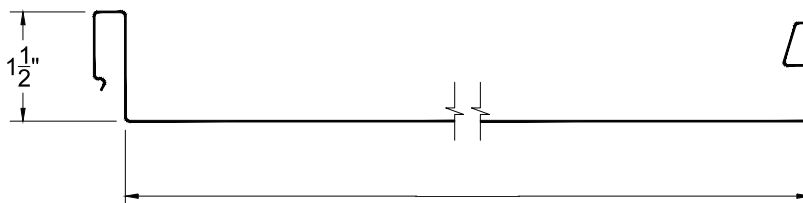


# DMC 550S PROFILE


## PROFILE




## PANEL RIB OPTIONS




Flat Panel




Clip Relief




Striations




Bead




Small V



Large V



Small Pencil



Large Pencil

## PRODUCT INFORMATION

### FINISHES

Available in a wide variety of coatings and colors. See the Drexel Metals color charts for standard colors and paint specifications.

### PANEL RIB

Factory made or field rolled to exact lengths options

- Flat Panel
- Clip Relief
- Striations
- Bead
- Small and Large V
- Small and Large Pencil

### INSTALLATION

Can be installed over plywood decking or insulated metal decking with approved underlayments. Please see Drexel Metals installation details for complete information.

### SLOPE

Minimum slope 3:12

### TESTING

- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental - SRI Third-Party Verified
- ASTM E-1646 - Water Penetration
- ASTM E-1680 - Air Leakage

Testing in accordance with



## WARRANTY

### 35 YEAR WARRANTY - GALVALUME AND ALUMINUM SUBSTRATES

35 year non pro-rated PVDF Paint Warranty

High-performance painted metal roofing product, carefully tensioned leveled for superior flatness.

### 25 YEAR WARRANTY - DREXLUME SUBSTRATE

Mill finished Galvalume® with a two-sided, clear acrylic finish.

**SHERWIN-WILLIAMS**  
Coil Coatings